



# AGM Battery series

Datasheet : 3FM4(6V4AH)

<b>Nominal Voltage</b>	6V
<b>Number of cell</b>	3
<b>Design Life</b>	5 years
<b>Nominal Capacity 77°F(25°C)</b>	
20 hour rate (0.20A, 5.25V)	4.00Ah
10 hour rate (0.40A, 5.25V)	3.80Ah
5 hour rate (0.72A, 5.25V)	3.60Ah
1 hour rate (3.06A, 4.8V)	3.06Ah
<b>Internal Resistance</b>	
Fully Charged battery 77°F(25°C)	≤80mOhms
<b>Self-Discharge</b>	
3% of capacity declined per month at 20°C(average)	
<b>Operating Temperature Range</b>	
Discharge	-20~60°C
Charge	-10~60°C
Storage	-20~60°C
<b>Max. Discharge Current 77°F(25°C)</b>	62A(5s)
<b>Short Circuit Current</b>	200A
<b>Charge Methods: Constant Voltage Charge 77°F(25°C)</b>	
Cycle use	2.40-2.45VPC
<b>Maximum charging current</b>	1.80A
<b>Temperature compensation</b>	-15mV/°C
<b>Standby use</b>	2.23-2.30VPC
<b>Temperature compensation</b>	10mV/°C



Wide Range Temperature



Warranty



Maintenance Free



AGM Technology




easy use



long life

## Mechanical Characteristics

Length(mm / inch)	70 / 2.76
Width(mm / inch)	47 / 1.85
Height(mm / inch)	101 / 3.98
Total Height(mm / inch)	107 / 4.21
Approx. Weight(Kg / lbs)	0.71 / 1.56

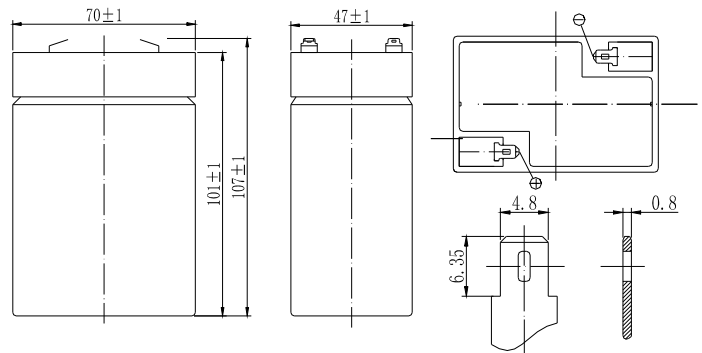

## Technical Characteristics

### Discharge Constant Current (Amperes at 77°F25°C)

End Point	Volts/Cell	5min	10min	15min	30min	1h	3h	5h	10h	20h
1.60V	16.0	11.2	9.00	4.80	3.06	1.24	0.78	0.42	0.21	
1.65V	15.2	10.7	8.60	4.61	2.95	1.20	0.76	0.40	0.21	
1.70V	14.3	10.1	8.19	4.41	2.83	1.16	0.74	0.40	0.21	
1.75V	13.4	9.5	7.77	4.19	2.71	1.11	0.72	0.38	0.20	
1.80V	2.50	9.0	7.33	3.98	2.58	1.06	0.69	0.37	0.19	

### Discharge Constant Power (Watts at 77°F25°C)

End Point	Volts/Cell	5min	10min	15min	30min	45min	1h	2h	3h	5h
1.60V	32.0	22.3	17.1	9.67	7.50	5.80	3.41	2.46	1.59	
1.65V	30.0	21.0	16.3	9.18	7.14	5.56	3.31	2.40	1.56	
1.70V	28.0	19.7	15.5	8.69	6.78	5.30	3.20	2.34	1.53	
1.75V	26.0	18.4	14.8	8.18	6.40	5.05	3.08	2.27	1.50	
1.80V	24.1	17.1	13.8	7.68	6.00	4.78	2.94	2.19	1.46	


(Note)The above characteristics data are average values obtained within three charge/discharge cycles. All data shall be changed without notice, Neata reserves the right to explain and update the information.




# AGM Battery series

Datasheet : 3FM4(6V4AH)


## Discharge Characteristics Curve

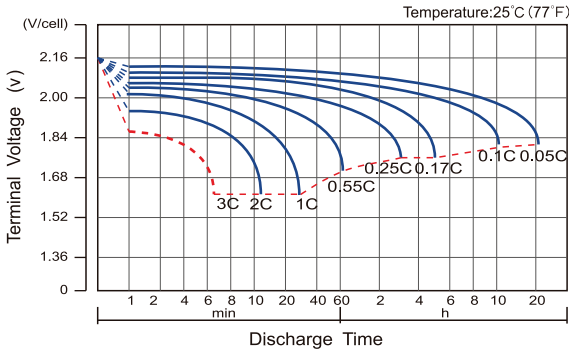


## Charge Characteristic Curve For Standby Use

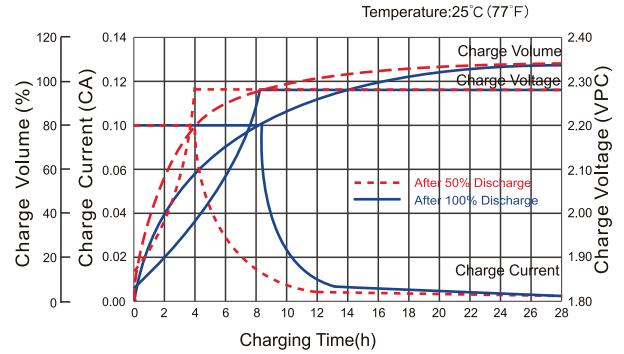


## Cycle Life In Relation To Depth Of Discharge

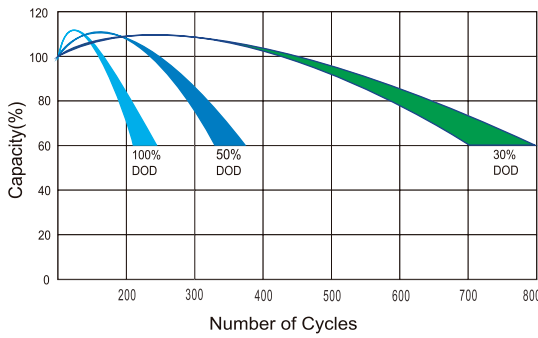


## Temperature Effects On Capacity

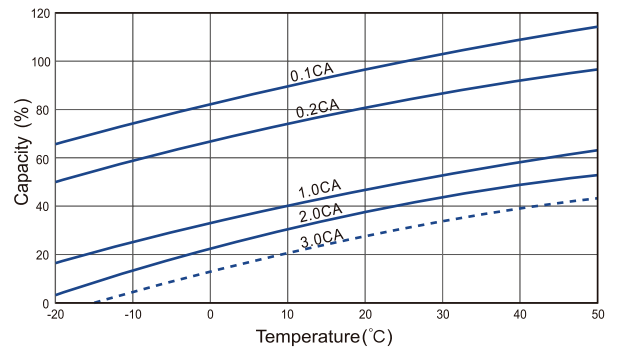


## Relationship Between Charging Voltage And Temperature

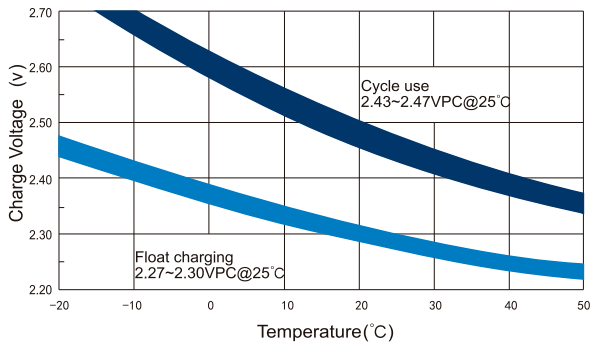

## Storage Characteristics

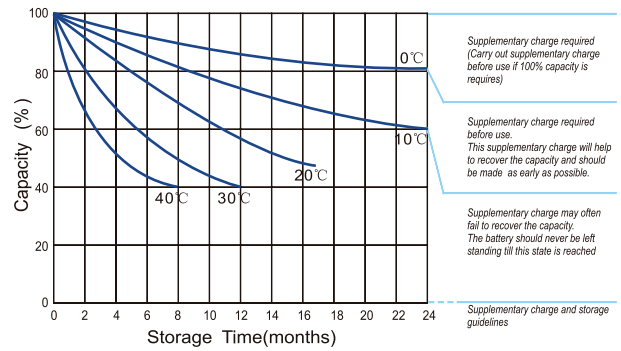

## Effect Of Temperature On Long Term Life

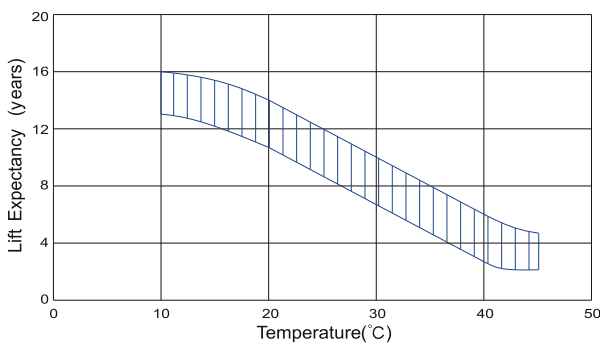

## Life Characteristics Of Standby Use

